

XF SERIES

High-Rel COTS AC/DC Power Supplies: 400~1000W




Features

- MIL-STD810C: Shock & Vibration
- MIL-STD-461F: EMC
- Conformal Coated & Ruggedized PowerPacs as standard
- Operating Temp: -55/40° +70°C
- 47-440Hz Input frequency
- Anti-Vibration Compound
- 1V to 58V standard output voltages
- All outputs are fully floating
- Extra low profile: 1U (40mm)
- Ultra high efficiency up to 91%
- Plug & Play Power – allows for fast custom Configurations (field configurable)
- Series or Parallel outputs for higher Voltages or currents
- Parallel PowerPacs for higher power
- OVP, OTP, OCP as standard
- 5V 250mA bias standby voltage
- Individual output control
- SEMI F47 Compliant
- 5 year warranty

Applications

- Harsh Industrial electronics
- Radar & Naval Communications

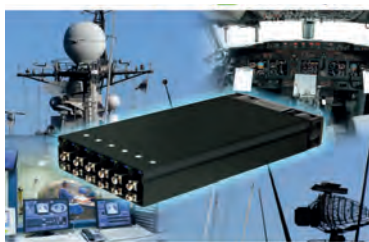

Description

The XF family of power supplies provides up to an incredible 1000W in an extremely compact 1U x 268 x 127mm package. Employing an innovative plug & play architecture the XF family brings unprecedented flexibility that allows users to instantly configure a custom power solution in less than 5 minutes.

Designed for use in harsh operating environments, the XF family is conformal coated and ruggedised to withstand extremes in shock and vibration as well as operation over a wide temperature range of -55/-40 to 70°C. Applications include Harsh Industrial, Test and Measurement, Communications, Fixed and Mobile Radar and Military Electronics which require COTS solutions.

All configurations carry full safety agency approvals, including UL60950 and EN60950 and are fully characterised for EMC according to MIL-STD-461F. All configurations meet the MIL-STD-810G standard for shock and vibration. EMC characterisation, Shock and Vibration and Thermal Stress reports are available.

powerPacs

	PowerPac	Power	PowerMod Slots	Operating Temperature	MIL-STD-461F	MIL-STD-810G	Conformal Coating
Hi-Rel COTS	XFA	400W	6	-55 to 70°C	Yes	Yes	Yes
	XFB	700W	6	-55 to 70°C	Yes	Yes	Yes
	XFC	1000W	6	-55 to 70°C	Yes	Yes	Yes
	XFN	1000W	6	-40 to 70°C	Yes	Yes	Yes

powerMods

Model	Vnom (V)	Set Point Adjust Range (V)	Dynamic Vtrim Range (V)	I _{max} (A)	Power (W)	Remote Sense	Power Good
XgA	12.0	10.8-15.6	-	12.5	150	-	-
XgB	24.0	19.2-26.4	-	8.3	200	-	-
XgC	36.0	28.8-39.6	-	5.6	200	-	-
XgD	48.0	38.5-50.4	-	4.2	200	-	-
XgE	24.0	5.0-28.0	-	5.0	120	-	Yes
XgF	24.0	5.0-28.0	-	3.0	72	-	Yes
	24.0	5.0-28.0	-	3.0	72	-	Yes
XgG	2.5	1.5-3.6	1.0-3.6	40.0	100	Yes	Yes
XgH	5.0	3.2-6.0	1.5-6.0	36.0	180	Yes	Yes
XgJ	12.0	6.0-15.0	4.0-15.0	18.3	220	Yes	Yes
XgK	24.0	12.0-30.0	8.0-30.0	9.2	220	Yes	Yes
XgL	48.0	24.0-58.0	8.0-58.0	5.0	240	Yes	Yes
Xg1	2.5	1.5-3.6	1.0-3.6	50.0	125	Yes	Yes
Xg2	5.0	3.2-6.0	1.5-6.0	40.0	200	Yes	Yes
Xg3	12.0	6.0-15.0	4.0-15.0	20.0	240	Yes	Yes
Xg4	24.0	12.0-30.0	8.0-30.0	10.0	240	Yes	Yes
Xg5	48.0	24.0-58.0	8.0-58.0	6.0	288	Yes	Yes

*When ordering individual powerMods for use with the XF Series add the suffix C for conformal coating.

L: SERIES

SPECIFICATION INPUT applies to configured units consisting of *powerMods* modules plugged into the appropriate *powerPac*

Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage Range	Input Frequency: 47 - 63Hz.	85		264	VAC
	Input Frequency: 47 - 440Hz.	90		120	VAC
Power Rating	XFA			400	W
	XFB			700	W
	XFC			1000	W
	XFN			1000	W
Input Current	XFA 85VAC in 400W out		7.5		A
	XFB 85VAC in 700W out		9.5		A
	XFC 85VAC in 765W out		11.5		A
	XFN 85VAC in 765W out		11.5		A
Inrush Current	230VAC @ 25°C			25	A
Undervoltage Lockout	Shutdown	65		74	VAC
Fusing	XFA 250V		F8A HRC		
	XFB 250V		F10A HRC		
	XFC 250V		F12A HRC		
	XFN 250V		F12AHRC		

OUTPUT

Parameter	Conditions/Description	Min	Nom	Max	Units
powerMod Power	As per <i>powerMod</i> table				
Output Adjustment Range	Manual or Electronic				
	As per <i>powerMod</i> Table				
Minimum Load			0		A
Line Regulation	For ±10% change from nominal line			±0.1	%
Load & Cross Regulation	For 25% to 75% load change			±0.2	%
Transient Response	For 25% to 75% load change Voltage Deviation Settling Time			10	%
				250	µs
Ripple and Noise	20MHz Bandwidth 100mv or 1.0% pk-pk				
Overvoltage Protection	Vmax (Latching)	110	130	150	%
Overcurrent Protection	Straight line with hiccup activation at <30% of Vnom	110		120	%
Remote Sense	Max. line drop compensation. (See <i>powerMod</i> table on page 1)			0.5	VDC
Overshoot				2	%
Turn-on Delay	From AC In / Enable signal			600 / 30	ms
Rise Time	Monotonic			5	ms
Hold-up Time	For nominal output voltages at full load.	20			ms
Output Isolation	Output to Output / Output to Chassis	500 / 500			VDC

GENERAL

Parameter	Conditions/Description	Min	Nom	Max	Units
Isolation Voltage	Primary to Secondary	3000			VAC
	Input to Chassis	1500			VAC
Efficiency	230VAC, 1000W @ 24V		91		%
Safety Agency Approvals	EN60950, UL60950, CSA22.2 No.950 UL File No. E181875				
Earth Leakage Current	230VAC, 50Hz, 25°C			1.5	mA
Bias Supply	Always ON. Current 250mA	4.8	5.0	5.5	VDC
Weight	PowerPac		1.2		kg
	Typical PowerMod		0.1		kg
Reliability	Telcordia SR-332 at 25°C and full load			1020	kh
	Telcordia SR-332 at 25°C and full load			1057	kh
	MIL-STD-217F at 25°C and full load			86	kh
	MIL-STD-217F at 25°C and full load			77	kh

EMC

Parameter	Standard	Level	Units
Emissions			
Conducted (note 6)	EN55011, EN55022, FCC: Level B	Compliant	
Radiated (note 6)	EN55011, EN55022, FCC: Level B	Compliant	
Harmonic Distortion	EN61000-3-2 Class A & MIL-STD-1399 SECTION 300A	Compliant	
Flicker and Fluctuation	EN61000-3-3	Compliant	
Immunity			
Electrostatic Discharge	EN61000-4-2: Level 2	Compliant	
Radiated RFI	EN61000-4-4: Level 3 & MIL-STD-461F. See note 6.	Compliant	
Fast Transients - burst	EN61000-4-4: Level 3	Compliant	
Input Line Surges	EN61000-4-5: Level 3 & MIL-STD-1399	Compliant	
Conducted RFI	EN61000-4-6: Level 3 & MIL-STD-461F. See note 6.	Compliant	
Voltage Dips	EN61000-4-11 & MIL-STD-70, SEMI F47 compliant. See note 7.	Compliant	

ENVIRONMENTAL

Parameter	Conditions/Description	Min	Nom	Max	Units
Operating Temperature	XFA, XFB, XFC	-55		+70	°C
	XFN operates to specification below -20°C after 10 min warm-up	-40		+70	°C
Storage Temperature		-55		+75	°C
Derating	Contact Excelsys for full temperature deratings				
Acoustic Noise			56.5		dBA
Relative Humidity	Non-condensing	5		95	%RH
Shock	3000 Bumps, 10G (16ms) half sine				
Vibration	1.5G : MIL-STD-810G	10		500	Hz

NOTES.

- All specifications at nominal input, full load, 25°C unless otherwise stated.
- This product is not intended for use as a stand alone unit and must be installed by qualified personnel.
- The specifications contained herein are believed to be correct at time of publication and are subject to change without notice.
- Derating required below -40 °C.
- With certain configurations when powering inductive or capacitive loads, it is recommended to use a blocking diode on the output.- consult Excelsys for further detail.
- An external filter may be required to meet certain conducted and radiated emissions requirements for MIL-STD-461F. For further details contact support@excelsys.com.
- SEMI F47 compliant at input voltages >160VAC. Consult Excelsys for details.
- Consult Excelsys for module derating at temperatures from -40°C to -55°C.

L: SERIES

Voltage Adjustment - Local

The multi-turn potentiometer that adjusts each output within the specified range may be accessed via the output panel of the power supply. Clockwise rotation increases output voltage. Resolution is approximately 5% of nominal voltage (Vnom) per turn. Certain applications may require military grade potentiometer or fixed resistors - consult Excelsys for details.


Voltage Adjustment - Remote (resistive / electronic)

The output voltage may be adjusted or trimmed by means of an external resistor or potentiometer network connected to the Vtrim pin. Linear Electronic programming is also possible and may be implemented according to the formula $V_{out} = K V_{control}$.

Parallel Connection

To achieve increased current capacity, simply parallel outputs using the standard parallel links. Excelsys 'wireless' sharing ensures that current hogging is not possible. To parallel connect outputs:

1. Switch on IShare switch to ON on powerMods.
2. Connect Negative parallel link.
3. Adjust output voltages of powerMods to within 5mV of each other.
4. Connect Positive Parallel Link.




Parallel Links available to order. Part Number XP1

*Certain applications may require military grade potentiometer or fixed resistors - consult Excelsys for details.

Series Connection

To achieve increased output voltages, simply series outputs using standard series links, paying attention to the requirements to maintain SELV levels if required in your system.



Series Links available to order. Part Number XS1

*Certain applications may require military grade potentiometer or fixed resistors - consult Excelsys for details.

Remote Sensing

When the load is remote from the power supply, the remote sense pins may be used to compensate for dynamic impedance effects caused by the power cabling.

Bias Voltage

A SELV isolated 5V (always on) bias voltage rated at 250mA is provided on J2 to facilitate miscellaneous system control functions.

Current Limit Adjustment


The output current limit setting may be adjusted (downwards only) by means of an external resistor connection to the I trim pin.

Inhibit/Enable

Inhibiting may be implemented either globally or on a per module basis (*powerPac* or *powerMod* inhibiting). Reverse logic (Enabling) may also be implemented.

AC Fail

Open collector signal indicating that the input voltage has failed or is less than 80Vac. This signal changes state giving 5ms of warning before loss of output regulation.

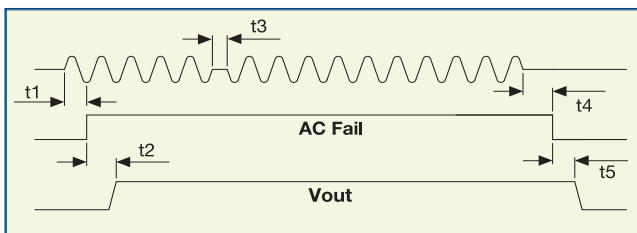


Temperature Alarm (Option 01)

Open collector signal indicating excessive *powerPac* temperatures due to fan failure or operation beyond ratings. This signal is activated at least 10ms prior to system shutdown.


Fan Fail (Option 01)

Open collector signal indicating that at least one of the system fans have failed. This does not cause system shutdown.

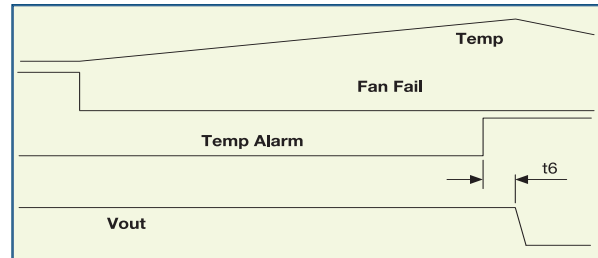

Power Good

Opto-isolated output signal indicates that the *powerMod* is operating correctly and output voltage is within normal band. Opto transistor ON = Good.

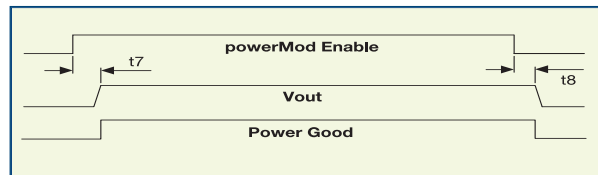

Indication LED's

Each *powerMod* has a visual indicator to identify that it is operating within normal ratings. Very useful for system diagnosis.


Output Signals and Power Connector Pinout

Pin	J3 Module (XgA to XgD)	J3 (XgG to XgL & Xg1 to Xg5)	J3 (XgE)	J3 (XgF)	J4 (Type A)	J4 (Type B)
1	not used	+Sense	not used	-pg (V2)	-Vout	-V2
2	Common	-Sense	not used	+pg (V2)	+Vout	+V2
3	not used	Vtrim	not used	Inhibit (V2)		-V1
4	not used	Itrim	Common	Common (V2)		+V1
5	+Inhibit	+Inhibit/Enable	-pg	-pg (V1)		
6	-Inhibit	-Inhibit/Enable	+pg	+pg (V1)		
7	not used	+pg	Inhibit	Inhibit (V1)		
8	not used	-pg	Common	Common (V1)		

Signal Connector Pinout


TYPE A: XgA-XgE & Xg1-Xg5

TYPE B: XgF

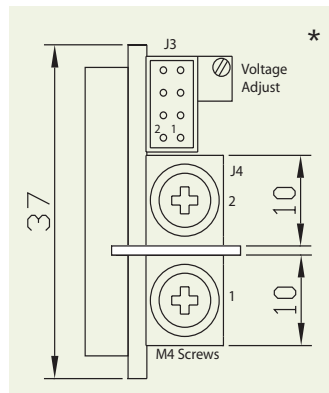

J4 Connector : M4 Screw
J3 Connector Mating Connector
Housing: Locking Molex 51110-0860
Non Locking Molex 51110-0850
Crimp Terminal: Molex p/n 50394

*Certain applications may require military grade potentiometer or fixed resistors - consult Excelsys for details.

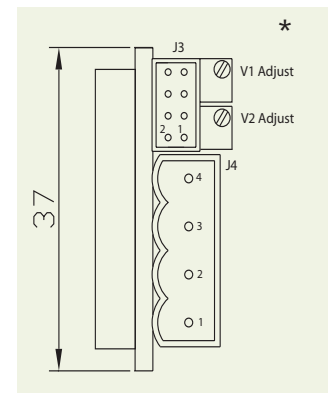



J4Connector : Camden 9200/4A
J3 Connector Mating Connector
Housing: Locking Molex 51110-0860
Non Locking Molex 51110-0850
Crimp Terminal: Molex p/n 50394

*Certain applications may require military grade potentiometer or fixed resistors - consult Excelsys for details.

L: SERIES



XF Series Derating Curves

XF Series Derating Curves

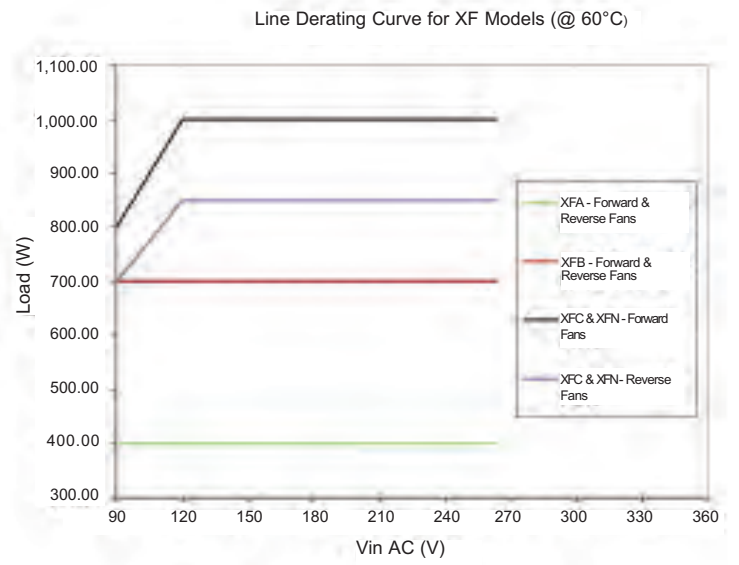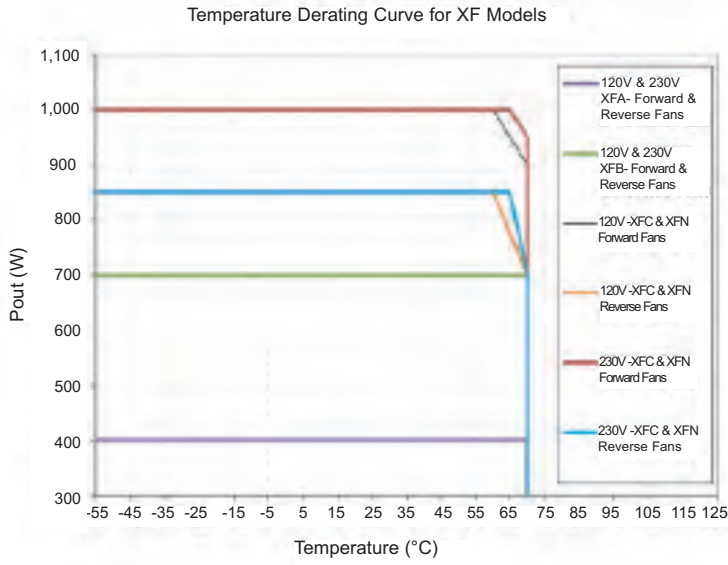


Efficiency (typical)

Mechanical Specifications (Standard IEC inlet)

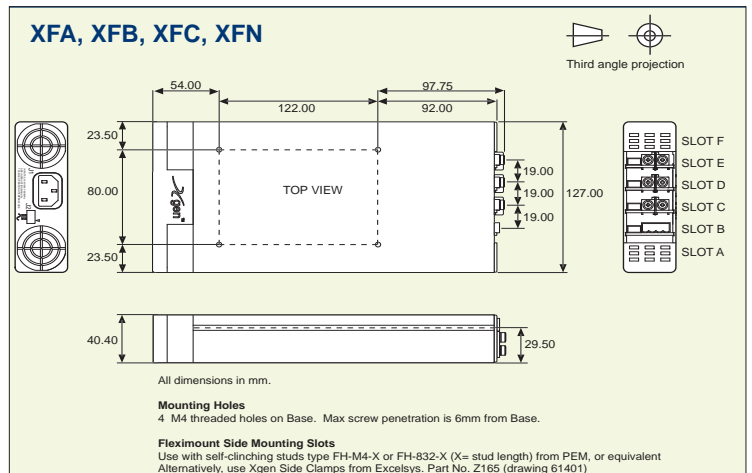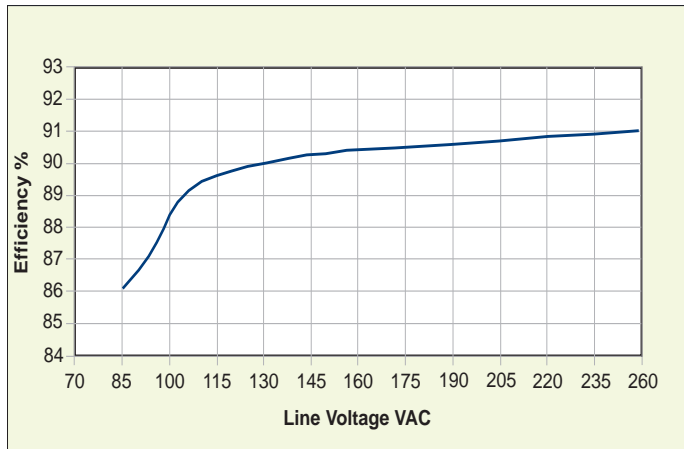


Mechanical Specifications with Input Cable (Option D)

The XF Series is also available with an input cable connection option allowing greater flexibility when mounting the XF in the system. Input cables are 300mm in length and come supplied with Faston connectors (consult Excelsys for alternatives).

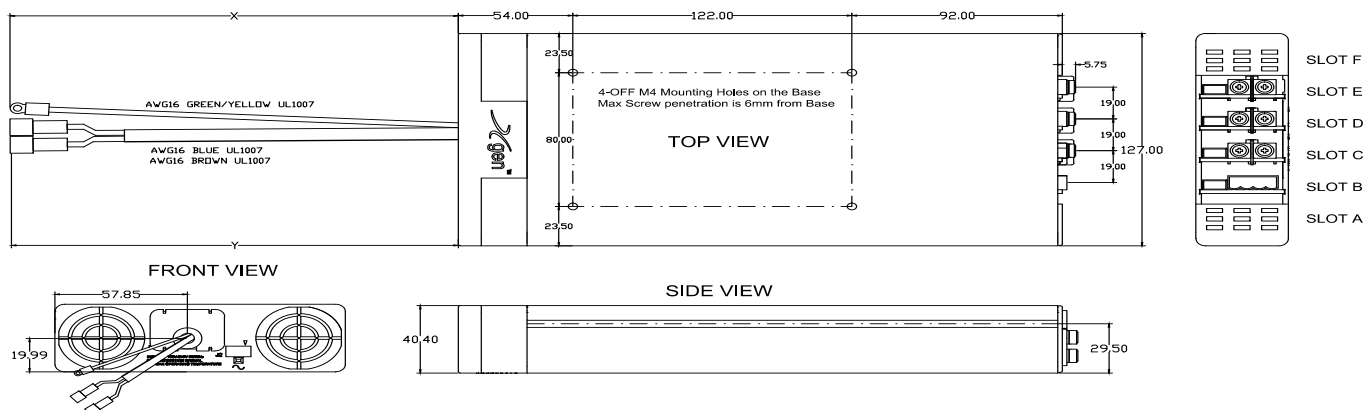

Side Mounting Slot works with self clinching stud type PEM - FH-M4-X or type PEM - FH-832-X or similar. X represents the length of the stud.
Alternatively, the Side Mounting Slots may be used with Excelsys Side Clamps (Drawing no. 61401)

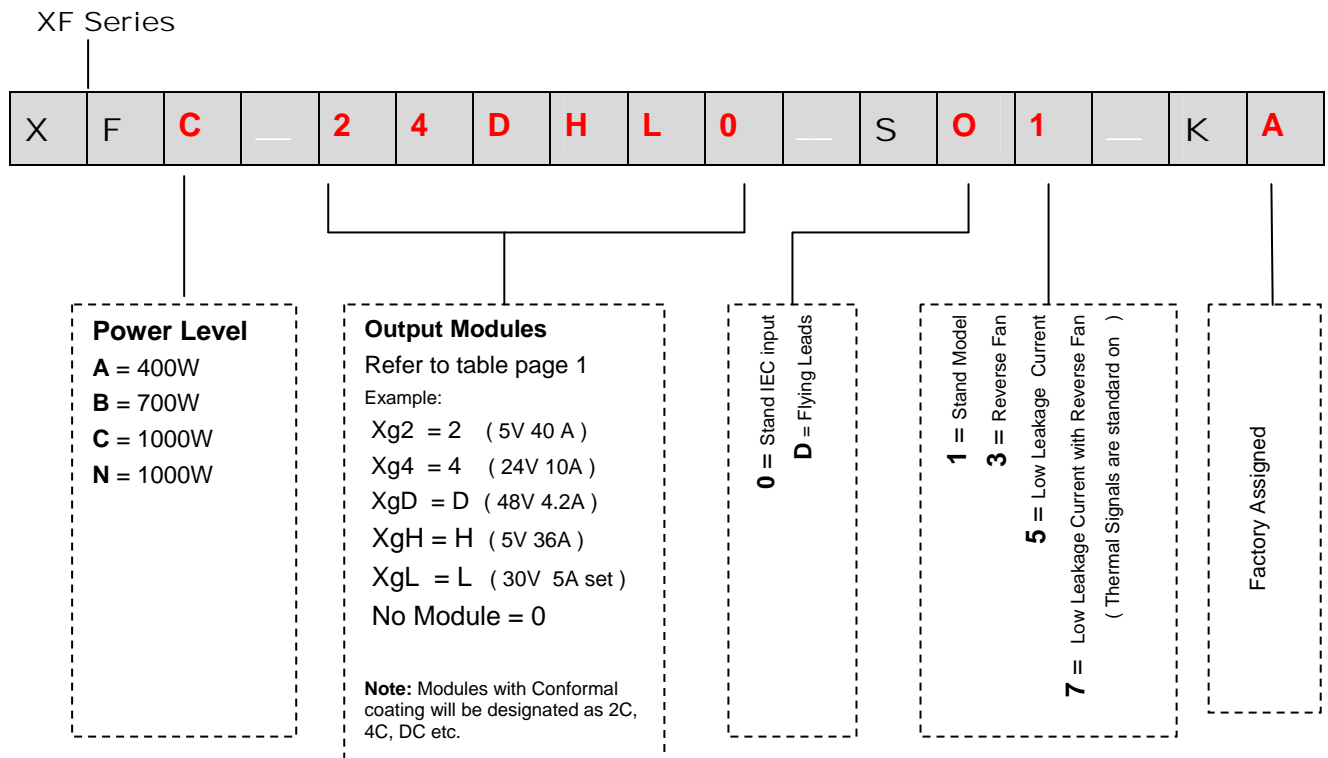

Part Numbering:

Fully configured units can be ordered using the above system and referring to page 1 for output module options.

Example: **XFC-24DHL0-SO1-KA**

Configurations:

Output modules can be ordered to required voltage settings. With standard links, fitted, the modules can also be connected in parallel or series for higher currents of voltages. For example.... Five XgL (48V) modules connected in series to provide 240VDC output at 5A.



Optional flying leads