

DNR120-480 SERIES

AC/DC Single Output DIN Rail: 120-480Watts



Features

- Up to 90% Efficiency
- Wide Adjustment Range
- Parallel Function
- DC Standby Versions
- Full Power from -40 °C to +60 °C
- Connector Options
- Suitable for battery charging

Specification

Input

Input Voltage	• 90-132/180-264 VAC, auto select, 210-375 VDC (DNR120AS, DNR240PS) 90-264 VAC, 120-375 VDC (DNR480PS)
Input Frequency	• 47-63 Hz
Inrush Current	• 24/48 A at 115/230 VAC (DNR120) 30/60 A at 115/230 VAC (DNR240) 25/50 A at 115/230 VAC (DNR480)
Power Factor	• Meets EN61000-3-2 for class A equipment
Earth Leakage Current	• 0.8 mA max
Input Protection	• T4A, 250 VAC (DNR120) T6.3A, 250 VAC (DNR240) T10A, 250 VAC (DNR480)

Output

Output Voltage	• See tables
Output Voltage Trim	• See tables
Initial Set Accuracy	• ±1%
Minimum Load	• No minimum load required
Start Up Delay	• <1000 ms (may increase at low temperature extremes)
Start Up Rise Time	• <150 ms
Hold Up Time	• 25/30 ms at 115/230 VAC (DNR120, DNR240) 30 ms at 115/230 VAC (DNR480)
Line Regulation	• ±0.5% max
Load Regulation	• ±1% (±5% for units in parallel)
Parallel Operation	• A maximum of 3 units can be paralleled. Total power available is 90% of the rated current of each unit. Redundancy module DPM10 available for load currents up to 10 A, contact sales.
Transient Response	• 4% max deviation recovering to within 1% in 1 ms for a 50% load change
Ripple & Noise	• 50 mV pk-pk (DNR120) 100 mV pk-pk (DNR240, DNR480) 20 MHz bandwidth (may increase at low temperature extremes)
Overvoltage Protection	• Output clamps at 125-145% Vnom, auto recovery
Overload Protection	• 105-145% constant current, auto recovery
Temp. Coefficient	• ±0.02%/°C

General

Efficiency	• See table
Isolation	• 3000 VAC Input to Output 1500 VAC Input to Ground 500 VAC Output to Ground
Switching Frequency	• See table
Signals	• DC ON indicator Green LED, DC LOW indicator Red LED DC OK: 24 V models
MTBF	• 450 kHrs typical Bellcore, Issue 6 at +40 °C, GB
DIN Rail	• Compatible with TS35/7.5 or TS35/15

Environmental

Operating Temperature	• -35 °C to +70 °C, derate linearly from +60 °C at 2.5%/°C (DNR120) -40 °C to +70 °C, derate linearly from +60 °C at 2.5%/°C (DNR240) -40 °C to +70 °C, derate linearly from +55 °C at 2.5%/°C, (DNR480) (see derating curves)
Cooling	• Convection-cooled with 25mm free space all sides
Operating Humidity	• 20-95% RH, non-condensing
Storage Temperature	• -40 °C to +85 °C
Shock	• 4 g, 22 ms, X, Y & Z axis
Vibration	• 1 g, 10 Hz to 500 kHz, along X, Y & Z axis

EMC & Safety

Emissions	• EN55022, class B conducted & radiated
Harmonic Currents	• EN61000-3-2, class A
Voltage Flicker	• EN61000-3-3
ESD Immunity	• EN61000-4-2, level 4 Perf Criteria A
Radiated Immunity	• EN61000-4-3, level 3 Perf Criteria A
EFT/Burst	• EN61000-4-4, level 3 Perf Criteria A
Surge	• EN61000-4-5, level 4 Perf Criteria A
Conducted Immunity	• EN61000-4-6, level 3 Perf Criteria A
Magnetic Field	• EN61000-4-8, level 4 Perf Criteria A
Dips & Interruptions	• EN61000-4-11, 30% 10 ms, 60% 100 ms, 100% 5000 ms Perf Criteria A, A, B
Safety Approvals	• EN60950-1 UL508 UL60950-1, cUL60950-1 Pollution Degree 2, CE Mark, UL60950-1 Overvoltage Category II, UL508 Overvoltage Category III, ANSI/ISA 12.12.01. (Class 1, Division 2, Groups A,B,C and D)

Models and Ratings



DNR120-480

Output Voltage	Output Voltage Trim	Output Current	Typical Efficiency	Typical Switching Frequency	Model Number
12 V	11.4-14.5 V	10.0 A	84%	80 kHz	DNR120AS12-I†^(1,2)
24 V	22.5-30.0 V	5.0 A	86%	80 kHz	DNR120AS24-I†^(1,2)
48 V	45.0-55.0 V	2.5 A	87%	80 kHz	DNR120AS48-I†^(1,2)
24 V	22.5-28.5 V	10.0 A	89%	40 kHz	DNR240PS24-I†^(1,2)
48 V	47.0-56.0 V	5.0 A	90%	40 kHz	DNR240PS48-I†^(1,2)
24 V	22.5-28.5 V	20.0 A	89%	65 kHz	DNR480PS24-I†^(1,2)
48 V	47.0-56.0 V	10.0 A	90%	65 kHz	DNR480PS48-I†^(1,2)

Notes


1. Add suffix '-D' for detachable connector option.
2. For DC standby, remove '-I' and add '#' to the end of the model number.

Derating Curves

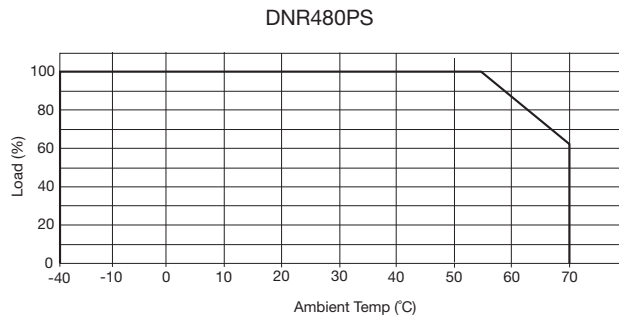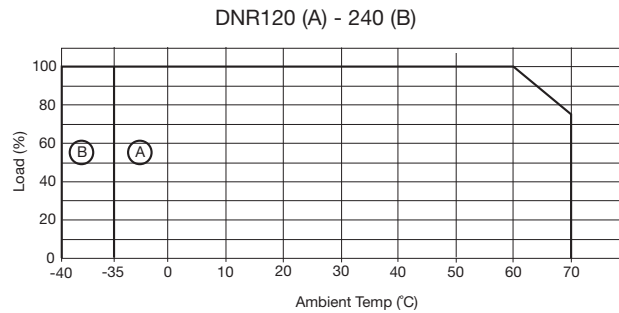

DC OK

Volt free contact closed when voltage at unit output is within specification. In standby system configured as shown this voltage may be provided by the PSU or battery.




Open = Output fail
Closed = Output good

Contact Rating: 0.3 A at 60 VDC
500 VDC isolation

120 W Models

Optional detachable connector ('-D' Option)

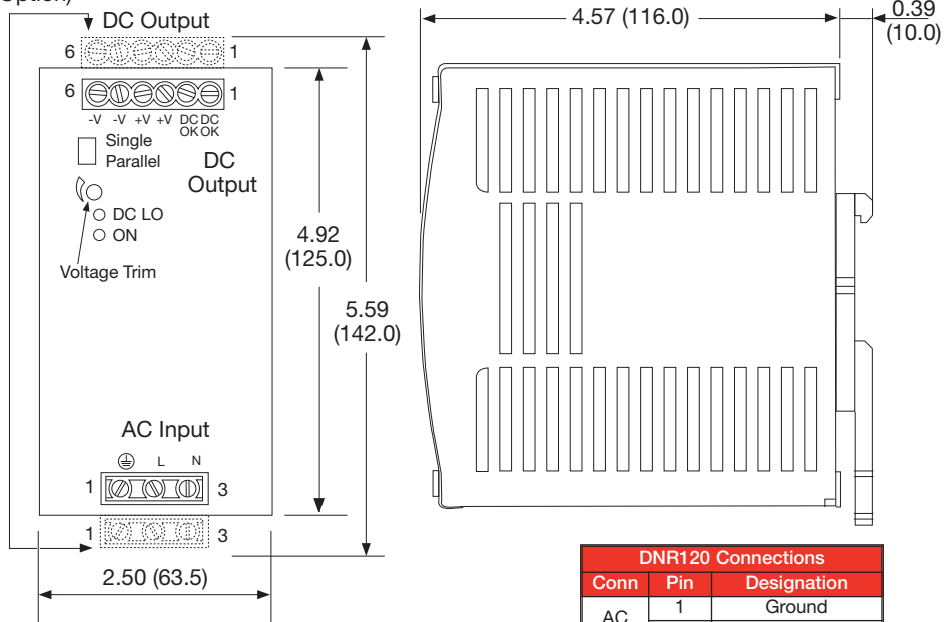

Notes


1. All dimensions in inches (mm).
2. Tolerance: ± 0.02 (0.5) maximum.
3. Weight 1.4 lb (630 g) approx.
4. Screw terminal: 10-24 AWG cable size. Detachable connector version: 14-24AWG cable size.
5. Connection screw maximum torque: Input: 9 lbs-in (1.0 Nm), Output: 5.5 lbs-in (0.6 Nm)

DNR120 Connections		
Conn	Pin	Designation
AC Input	1	Ground
	2	Line
	3	Neutral
DC Output	1	DC OK *
	2	DC OK *
	3	Positive
	4	Positive
	5	Negative
	6	Negative

* 24 V & standby models only.

240 W Models

Optional detachable connector ('-D' Option)

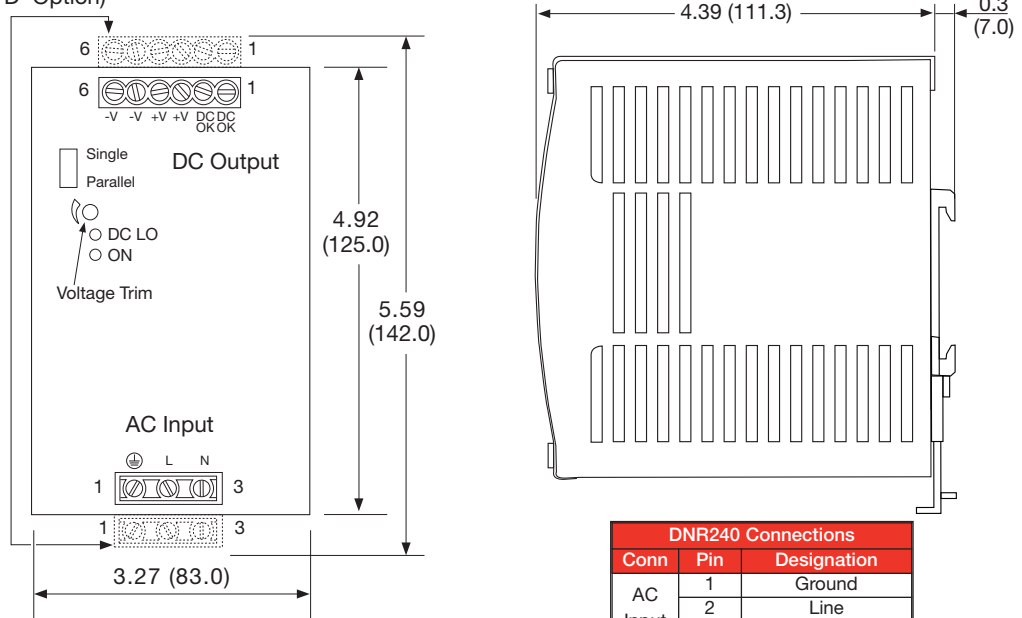



Notes

1. All dimensions in inches (mm).
2. Tolerance: ± 0.02 (0.5) maximum.
3. Weight 3.0 lb (1360 g) approx.
4. Screw terminal: 10-24 AWG cable size. Detachable connector version: 14-24AWG cable size.
5. Connection screw maximum torque: Input: 9 lbs-in (1.0 Nm), Output: 5.5 lbs-in (0.6 Nm)

DNR240 Connections		
Conn	Pin	Designation
AC Input	1	Ground
	2	Line
	3	Neutral
DC Output	1	DC OK*
	2	DC OK*
	3	Positive
	4	Positive
	5	Negative
	6	Negative

* 24 V & standby models only.

480 W Models

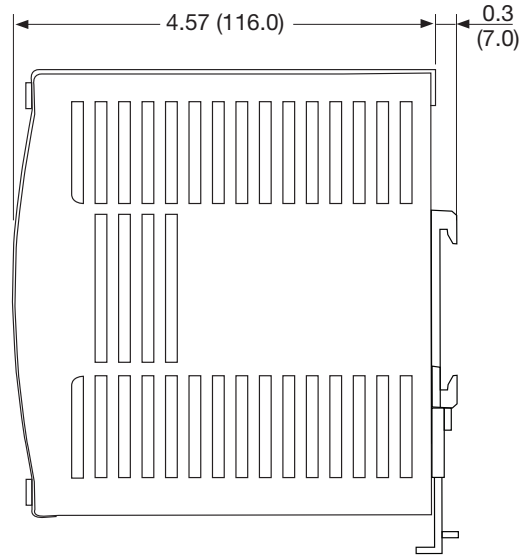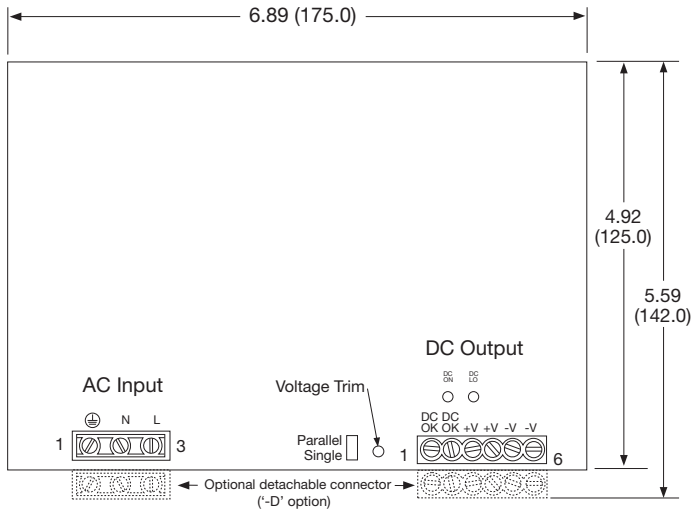

Notes


1. All dimensions in inches (mm).
2. Tolerance: ± 0.02 (0.5) maximum.
3. Weight 4.2 lb (1920 g) approx.
4. Screw terminal: 10-24 AWG cable size. Detachable connector version: 14-24AWG cable size.
5. Connection screw maximum torque: Input: 9 lbs-in (1.0 Nm), Output: 5.5 lbs-in (0.6 Nm)

DNR480PS Connections		
Conn	Pin	Designation
AC Input	1	Ground
	2	Neutral
	3	Line
DC Output	1	DC OK*
	2	DC OK*
	3	Positive
	4	Positive
	5	Negative
	6	Negative

* 24 V and standby models only.

Standby Versions

Maximum current drain from battery by PSU when inactive 22 mA.

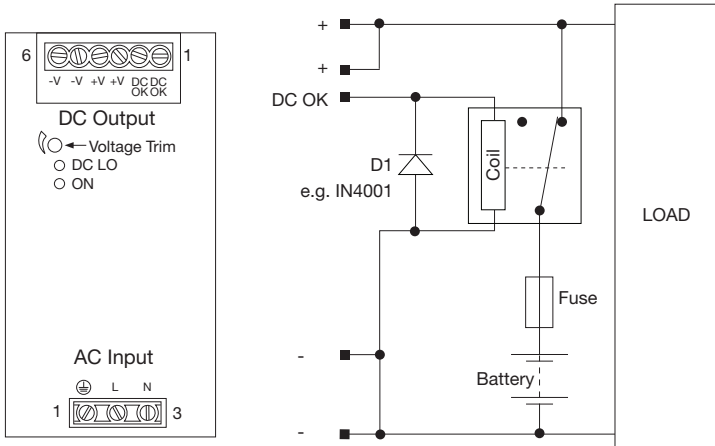

Output Set Voltages For Standby Versions			
Model ⁽¹⁾	Voltage	Current	DC OK Shutoff
DNR120AS12#	13.6 V	8.8 A	10.8 V $\pm 5\%$
DNR120AS24#	27.2 V	4.4 A	21.6 V $\pm 5\%$
DNR120AS48#	54.5 V	2.2 A	43.2 V $\pm 5\%$
DNR240PS24#	27.2 V	8.8 A	21.6 V $\pm 5\%$
DNR240PS48#	54.5 V	4.4 A	43.2 V $\pm 5\%$
DNR480PS24#	27.2 V	17.6 A	21.6 V $\pm 5\%$
DNR480PS48#	54.5 V	8.8 A	43.2 V $\pm 5\%$

DNR120-480 Connections					
Conn	Pin	Designation	Conn	Pin	Designation
AC Input	1	Ground	DC Output	1	DC OK
	2	Line		2	DC OK
	3	Neutral		3	Positive
			4	Positive	
			5	Negative	
			6	Negative	

1. Suffix # indicates DC standby version.