

FDC15 SERIES

DC / DC Single & Dual Output: 15 Watts



Features

- 4:1 wide Input range option 9~36V & 18~75V
- Single & Dual outputs
- Industry Standard 2 x 1.6in package
- High efficiency up to 82%
- Regulated output & Short circuit protection
- 1600V isolation
- Five sided continuous copper shield
- Remote ON / OFF- Standard Positive logic
- High operating temperature +85°C
- Fixed switching frequency
- Optional heat sink: P/N: 7G-0011A

Specifications:

| | | | |
|---|--|---------------------------|---|
| Input Voltage | 24VDC (9 ~ 36) 48VDC (18 ~ 75) | Efficiency | Model dependant 80 ~ 82% |
| Input Filter | Pi type | Isolation | 1600VDC |
| Input Surge Voltage. (100mS) | 24V: 50VDC. 48V: 100VDC | Isolation Cap. | 300pF |
| Input Reflected Ripple Current | 20mA pk-pk (@ nominal input & 100% load | Switching Freq. | Standard 270KHz |
| Start Up time | 20mS constant resistive load | Safety | EN60950-1, UL60950-1 |
| Remote ON/OFF (Positive logic) | DC-DC ON Open or 3.5V < Vr < 12V DC-DC OFF Short or 0V < Vr < 1.2V Input current of remote control pin: 0.5mA Remote off state input current: 2.5mA | Case Material | Nickel-coated copper |
| Output power | 15 watts | Base Material | Non-conductive black plastic |
| Voltage Accuracy | ±1.0% | Potting | Epoxy UL94-V0 |
| Voltage Adjustment | ±10% by external trim | Dimensions | 50.8 x 40.6 x 10.2mm |
| Minimum Load | See table | Weight | 48g |
| Line Regulation | Single ±0.2% Dual ±0.5% | MTBF | 2.041 x 10 ⁶ Hrs |
| Load Regulation | Single ±0.5% , Dual ±1% (Min load -100% load) | Operating Temp | Standard: -45°C to +85°C (with derating) |
| Cross Regulation | ±5% Asymmetrical load: 25-100% load) | Case Temp | +100°C maximum case temperature |
| Ripple & noise | See table. 20MHZ bandwidth | Thermal Impedance | 10°C / watt Standard convection 8.24°C / watt with optional heatsink |
| Temp. Coefficient | ±0.02% / °C | Thermal shock | MIL-STD-810F |
| Transient Response | 250uS (25% load step change) | Vibration | 10-55Hz, 10G, 30min along X, Y,Z |
| Over Voltage Protection | 5.0V: 6.2V 12V: 15V 15V: 18V | Humidity | 5-95% RH |
| Overload Protection | Typically 150% of load | EMC | EN55022 Class A Consult office for Class B design |
| Short Circuit protection | Continuous hiccup mode | ESD | EN61000-4-2 |
| | | Radiated Immunity | EN61000-4-3 |
| | | Fast Transients | EN61000-4-4 |
| | | Surge | EN61000-4-5 |
| | | Conducted Immunity | EN61000-4-6 |





FDC15 SERIES

DC / DC Single & Dual Output: 15 Watts

| Model | Input V | Output V | Output Current | | Output Ripple & Noise | Input Current | | Eff (%) | Capacitor Load max |
|-------------|-----------|----------|----------------|-----------|-----------------------|---------------|-----------|---------|--------------------|
| | | | Min. load | Full load | | No load | Full load | | |
| FDC15-24S05 | 9 – 36 V | 5 V | 210mA | 3000mA | 75mVp-p | 20mA | 822mA | 80 | 6800uF |
| FDC15-24S12 | 9 – 36 V | 12 V | 100mA | 1250mA | 75mVp-p | 10mA | 801mA | 82 | 890uF |
| FDC15-24S15 | 9 – 36 V | 15 V | 80mA | 1000mA | 75mVp-p | 20mA | 801mA | 82 | 570uF |
| FDC15-24D05 | 9 – 36 V | ± 5 V | ± 105mA | ± 1500mA | 75mVp-p | 20mA | 822mA | 80 | ± 1700uF |
| FDC15-24D12 | 9 – 36 V | ± 12 V | ± 50mA | ± 625mA | 75mVp-p | 20mA | 801mA | 82 | ± 300uF |
| FDC15-24D15 | 9 – 36 V | ± 15 V | ± 40mA | ± 500mA | 75mVp-p | 20mA | 801mA | 82 | ± 200uF |
| FDC15-48S05 | 18 – 75 V | 5 V | 210mA | 3000mA | 75mVp-p | 15mA | 411mA | 80 | 6800uF |
| FDC15-48S12 | 18 – 75 V | 12 V | 100mA | 1250mA | 75mVp-p | 15mA | 401mA | 82 | 890uF |
| FDC15-48S15 | 18 – 75 V | 15 V | 80mA | 1000mA | 75mVp-p | 10mA | 401mA | 82 | 570uF |
| FDC15-48D05 | 18 – 75 V | ± 5 V | ± 105mA | ± 1500mA | 75mVp-p | 10mA | 411mA | 80 | ± 1700uF |
| FDC15-48D12 | 18 – 75 V | ± 12 V | ± 50mA | ± 625mA | 75mVp-p | 20mA | 401mA | 82 | ± 300uF |
| FDC15-48D15 | 18 – 75 V | ± 15 V | ± 40mA | ± 500mA | 75mVp-p | 15mA | 401mA | 82 | ± 200uF |


Notes:

1. MTBF as per BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C. (Ground fixed and controlled environment).
2. Typical values at nominal input voltage and full load.
3. The output requires a minimum loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.
4. The ON/OFF control pin voltage is reference to -Vin.
5. Heat-sink is optional and **P/N: 7G-0011A**.
6. An external filter capacitor is required if the module has to meet EN61000-4-5. The filter capacitor recommended: Nippon chemi-con KY series, 220µF/100V, ESR 48mΩ.

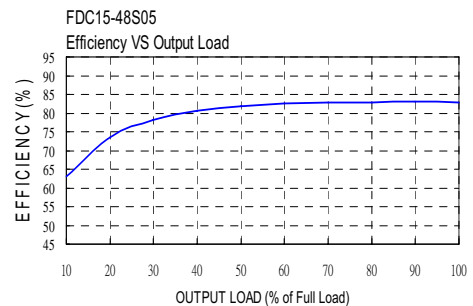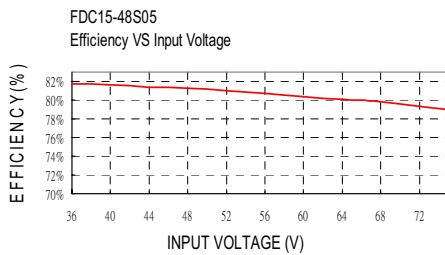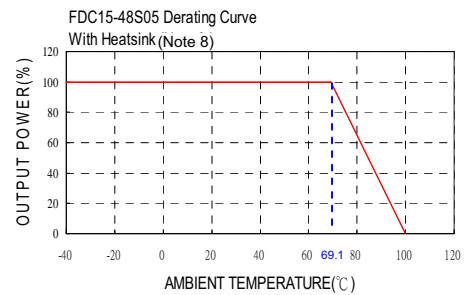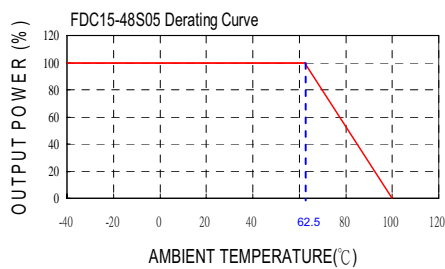



FDC15 SERIES

DC / DC Single & Dual Output: 15 Watts

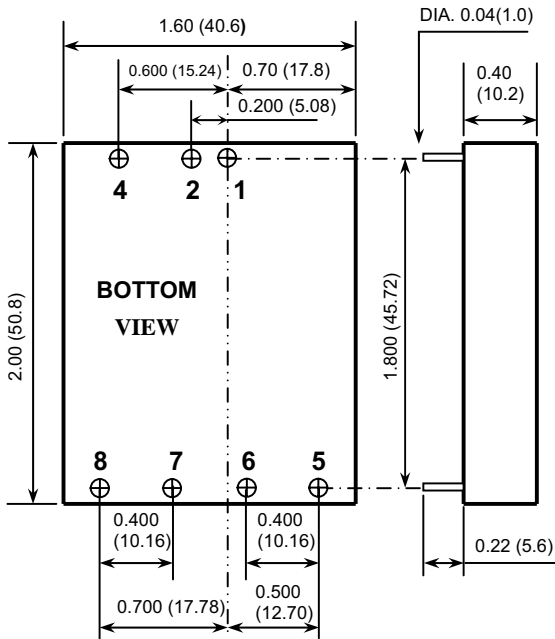

- All dimensions in Inches (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
- Pin pitch tolerance ±0.01(0.25)
- Pin dimension tolerance ±0.004 (0.1)


| Pin Assignment | | |
|----------------|----------|----------|
| PIN | SINGLE | DUAL |
| 1 | + INPUT | + INPUT |
| 2 | - INPUT | - INPUT |
| 4 | CTRL | CTRL |
| 5 | NO PIN | + OUTPUT |
| 6 | + OUTPUT | COMMON |
| 7 | - OUTPUT | - OUTPUT |
| 8 | TRIM | TRIM |

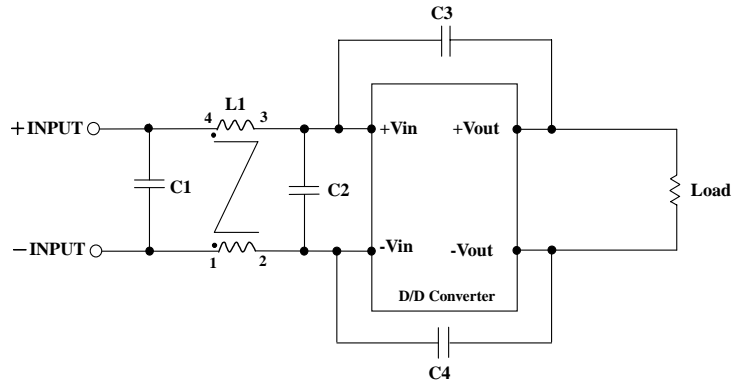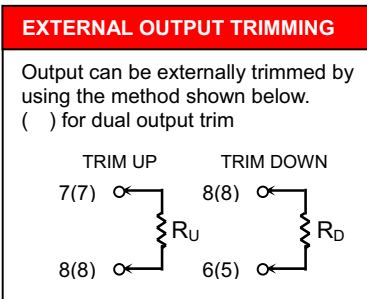

Recommended Filter for EN55022 Class B Compliance

The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

| | C1 | C2 | C3 | C4 | L1 |
|-------------|-------------------------|-------------------------|--------------------|--------------------|-------------------------------------|
| FDC15-24xxx | 6.8uF/50V 1812 MLCC | N/A | 1000pF/2KV MLCC | 1000pF/2KV MLCC | 450uH Common Choke PMT-048 |
| FDC15-48xxx | 2.2uF/100V 1812 MLCC | 2.2uF/100V 1812 MLCC | 1000pF/2KV MLCC | 1000pF/2KV MLCC | 450uH Common Choke PMT-048 |

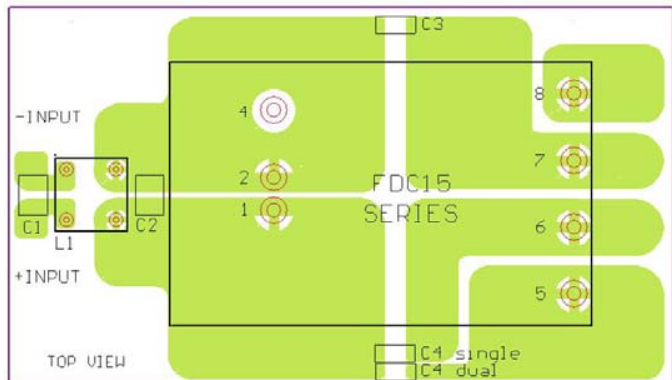

Recommended EN55022 Class B Filter Circuit Layout