


IE SERIES

DC/DC Single: 1 Watt

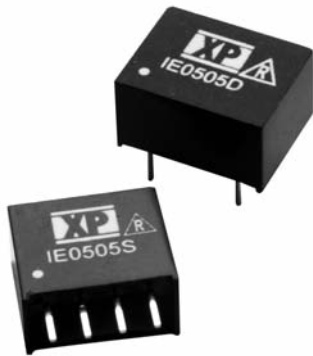

Features

- Single Output
- SIP or DIP Package
- 1000 VDC Isolation
- Optional 3000 VDC Isolation
- Short Circuit Protection
- -40 °C to +85 °C Operation
- 10% Input range

Specification

Input

- Input Voltage Range • Nominal $\pm 10\%$
- Input Reflected Ripple Current • 20 mA pk-pk through 12 μ H inductor 5Hz to 20 MHz
- Input Reverse Voltage Protection • None

Output

- Output Voltage • See table
- Minimum Load • None⁽⁵⁾
- Line Regulation • 1.2%/1% Δ Vin
- Load Regulation • $\pm 10\%$ 20-100% load change (3.3 V models $\pm 20\%$)
- Setpoint Accuracy • $\pm 3\%$
- Ripple & Noise • 100 mV pk-pk max, 20 MHz bandwidth
- Temperature Coefficient • 0.02%/°C
- Maximum Capacitive Load • 220 μ F

General

- Efficiency • See table
- Isolation Voltage • 1000 VDC minimum (3000 VDC -H option)
- Isolation Resistance • 10⁹ Ω
- Isolation Capacitance • 60 pF typical
- Switching Frequency • Variable, 80 KHz typical
- MTBF • >1.1 Mhrs to MIL-HDBK-217F at 25 °C, GB

Environmental

- Operating Temperature • -40 °C to +85 °C
- Storage Temperature • -40 °C to +125 °C
- Case Temperature • 100 °C max
- Cooling • Convection-cooled

Notes

1. For DIP package, replace 'S' in model number with 'D'.
2. Add suffix 'H' to model number for 3000 VDC isolation.
3. For 48 VDC in, specify model number as IE48XXS (not available in DIP package).
4. 48 V models dimension is 0.29 (7.50).
5. Operation at no load will not damage unit but it may not meet all specifications.
6. All dimensions in inches (mm).
7. Pin pitch tolerance: ± 0.014 (± 0.35)
8. Case tolerance: ± 0.02 (± 0.5)
9. Weight: SIP 0.003 lbs (1.4 g), DIP 0.004 lbs (1.8 g)

Input Voltage ⁽³⁾	No Load Input Current	Output Voltage	Output Current	Efficiency	Model Number ^(1,2)
3.3 VDC	25 mA	3.3 V	300 mA	75%	IE0303S
	25 mA	5.0 V	200 mA	78%	IE0305S
	30 mA	9.0 V	111 mA	78%	IE0309S
	45 mA	12.0 V	84 mA	78%	IE0312S
	40 mA	15.0 V	66 mA	78%	IE0315S
	40 mA	24.0 V	42 mA	78%	IE0324S
5 VDC	25 mA	3.3 V	300 mA	72%	IE0503S [^]
	25 mA	5.0 V	200 mA	75%	IE0505S ^{†^}
	25 mA	9.0 V	111 mA	77%	IE0509S [^]
	25 mA	12.0 V	84 mA	78%	IE0512S ^{†^}
	25 mA	15.0 V	66 mA	78%	IE0515S ^{†^}
	25 mA	24.0 V	42 mA	78%	IE0524S [^]
12 VDC	16 mA	3.3 V	300 mA	72%	IE1203S [^]
	16 mA	5.0 V	200 mA	75%	IE1205S ^{†^}
	16 mA	9.0 V	111 mA	77%	IE1209S [^]
	16 mA	12.0 V	84 mA	78%	IE1212S ^{†^}
	16 mA	15.0 V	66 mA	78%	IE1215S ^{†^}
	16 mA	24.0 V	42 mA	78%	IE1224S [^]
24 VDC	10 mA	3.3 V	300 mA	72%	IE2403S [^]
	10 mA	5.0 V	200 mA	75%	IE2405S ^{†^}
	10 mA	9.0 V	111 mA	77%	IE2409S [^]
	10 mA	12.0 V	84 mA	78%	IE2412S ^{†^}
	10 mA	15.0 V	66 mA	78%	IE2415S ^{†^}
	10 mA	24.0 V	42 mA	78%	IE2424S [^]

Mechanical Details

