

JTC04-06 SERIES

DC/DC Single & Dual Output: 4 - 6 Watts



Specification

Input

Input Voltage Range	<ul style="list-style-type: none">• 24 V (9-36 VDC)• 48 V (18-72 VDC)
Input Current	<ul style="list-style-type: none">• See table
Input Filter	<ul style="list-style-type: none">• Pi network
Input Reflected Ripple	<ul style="list-style-type: none">• 35 mA pk-pk through 12 μH inductor
Input Surge	<ul style="list-style-type: none">• 24 V models 40 VDC for 100 ms• 48 V models 80 VDC for 100 ms
Undervoltage Lockout	<ul style="list-style-type: none">• None
Input Reverse Voltage Protection	<ul style="list-style-type: none">• None

Output

Output Voltage	<ul style="list-style-type: none">• See table
Output Voltage Balance	<ul style="list-style-type: none">• $\pm 1\%$ max, dual output models
Minimum Load	<ul style="list-style-type: none">• No minimum load required
Initial Set Accuracy	<ul style="list-style-type: none">• $\pm 1\%$ max
Start Up Delay	<ul style="list-style-type: none">• <800 ms
Start Up Rise Time	<ul style="list-style-type: none">• <10 ms
Line Regulation	<ul style="list-style-type: none">• $\pm 0.5\%$ max
Load Regulation	<ul style="list-style-type: none">• $\pm 0.5\%$ max, $\pm 1.5\%$ max for 3.3 V and ± 3.3 V models
Cross Regulation	<ul style="list-style-type: none">• $\pm 5\%$ on dual output models (see note 4)
Transient Response	<ul style="list-style-type: none">• <1.5% max deviation, recovery to within 1% in 200 μs for a 50% load change
Ripple & Noise	<ul style="list-style-type: none">• 60 mV pk-pk for 3.3 V to 15 V models, 100 mV pk-pk for 18 V models, 150 mV pk-pk for 24 V models, 20 MHz bandwidth
Short Circuit Protection	<ul style="list-style-type: none">• Trip & restart (Hiccup mode), auto recovery
Maximum Capacitive Load	<ul style="list-style-type: none">• See tables
Temperature Coefficient	<ul style="list-style-type: none">• $\pm 0.02/^{\circ}$C max

Features

- 4:1 Input Range
- DIP-24 Metal Package
- Operating Temperature -40° C to $+100^{\circ}$ C
- Single & Dual Outputs
- Continuous Short Circuit Protection
- 1500 VDC Isolation, 3500 VDC Option
- 3 Year Warranty

General

Efficiency	<ul style="list-style-type: none">• See tables
Isolation Voltage	<ul style="list-style-type: none">• 1500 VDC Input to Output, for optional high isolation version 3500 VDC input to output add suffix '-H' to model number• 1000 VDC Input to Case• 1000 VDC Output to Case
Isolation Resistance	<ul style="list-style-type: none">• $10^9\Omega$
Switching Frequency	<ul style="list-style-type: none">• 266 kHz typical
Power Density	<ul style="list-style-type: none">• JTC04: 10 W/in³, JTC06: 15 W/in³
MTBF	<ul style="list-style-type: none">• >1.0 Mhrs to MIL-HDBK-217F at 25 $^{\circ}$C, GB

Environmental

Operating Temperature	<ul style="list-style-type: none">• -40°C to $+100^{\circ}$C, derate from 100% load at $+85^{\circ}$C to no load at $+100^{\circ}$C
Case Temperature	<ul style="list-style-type: none">• $+100^{\circ}$C max
Storage Temperature	<ul style="list-style-type: none">• -40°C to $+125^{\circ}$C
Humidity	<ul style="list-style-type: none">• Up to 95%, non-condensing
Cooling	<ul style="list-style-type: none">• Natural convection

EMC

Emissions	<ul style="list-style-type: none">• EN55022 class A conducted with external components - see application note
ESD Immunity	<ul style="list-style-type: none">• EN61000-4-2, 8 kV air discharge Perf Criteria A, 4 kV contact discharge Perf Criteria A
EFT/Burst	<ul style="list-style-type: none">• EN61000-4-4, level 1, Perf Criteria A
Conducted Immunity	<ul style="list-style-type: none">• EN61000-4-6, 3 Vrms, Perf Criteria A
Magnetic Fields	<ul style="list-style-type: none">• EN61000-4-8, 1 A/m, Perf Criteria A


Input Voltage	Output Voltage	Output Current	Input Current ⁽²⁾		Maximum Capacitive Load ⁽³⁾	Efficiency	Model Number ⁽¹⁾
			No Load	Full Load			
9-36 V	3.3 V	1200 mA	12 mA	220 mA	1000 µF	75%	JTC0424S3V3†^A
	5.0 V	800 mA	15 mA	211 mA	1000 µF	79%	JTC0424S05†^A
	9.0 V	445 mA	12 mA	201 mA	220 µF	83%	JTC0424S09
	12.0 V	333 mA	15 mA	203 mA	100 µF	82%	JTC0424S12†^A
	15.0 V	267 mA	15 mA	203 mA	220 µF	82%	JTC0424S15†^A
	18.0 V	223 mA	15 mA	203 mA	10 µF	82%	JTC0424S18
	24.0 V	167 mA	18 mA	203 mA	220 µF	82%	JTC0424S24
	±3.3 V	±606 mA	12 mA	222 mA	±470 µF	75%	JTC0424D03†^A
	±5.0 V	±400 mA	15 mA	211 mA	±100 µF	79%	JTC0424D05†^A
	±9.0 V	±222 mA	18 mA	208 mA	±47 µF	80%	JTC0424D09
	±12.0 V	±167 mA	15 mA	203 mA	±47 µF	82%	JTC0424D12†^A
	±15.0 V	±134 mA	20 mA	208 mA	±10 µF	80%	JTC0424D15†^A
±24.0 V	±84 mA	18 mA	208 mA	±22 µF	80%	JTC0424D24	
18-72 V	3.3 V	1200 mA	10 mA	110 mA	1000 µF	76%	JTC0448S3V3†^A
	5.0 V	800 mA	8 mA	106 mA	470 µF	79%	JTC0448S05†^A
	9.0 V	445 mA	10 mA	100 mA	330 µF	83%	JTC0448S09
	12.0 V	333 mA	12 mA	104 mA	1000 µF	80%	JTC0448S12†^A
	15.0 V	267 mA	10 mA	99 mA	47 µF	84%	JTC0448S15†^A
	18.0 V	223 mA	10 mA	99 mA	10 µF	84%	JTC0448S18
	24.0 V	167 mA	15 mA	102 mA	22 µF	82%	JTC0448S24
	±3.3 V	±606 mA	10 mA	107 mA	±680 µF	78%	JTC0448D03†^A
	±5.0 V	±400 mA	15 mA	106 mA	±330 µF	79%	JTC0448D05†^A
	±9.0 V	±222 mA	15 mA	104 mA	±47 µF	80%	JTC0448D09
	±12.0 V	±167 mA	12 mA	102 mA	±100 µF	82%	JTC0448D12†^A
	±15.0 V	±134 mA	15 mA	104 mA	±100 µF	80%	JTC0448D15†^A
±24.0 V	±84 mA	15 mA	104 mA	±10 µF	80%	JTC0448D24	

Input Voltage	Output Voltage	Output Current	Input Current ⁽²⁾		Maximum Capacitive Load ⁽³⁾	Efficiency	Model Number ⁽¹⁾
			No Load	Full Load			
9-36 V	3.3 V	1400 mA	12 mA	253 mA	1000 µF	76%	JTC0624S3V3†^A
	5.0 V	1200 mA	10 mA	312 mA	1000 µF	80%	JTC0624S05†^A
	9.0 V	667 mA	12 mA	301 mA	220 µF	83%	JTC0624S09
	12.0 V	500 mA	15 mA	301 mA	1000 µF	83%	JTC0624S12†^A
	15.0 V	400 mA	18 mA	301 mA	470 µF	83%	JTC0624S15†^A
	18.0 V	334 mA	15 mA	301 mA	47 µF	83%	JTC0624S18
	24.0 V	250 mA	18 mA	305 mA	47 µF	82%	JTC0624S24
	±3.3 V	±909 mA	12 mA	338 mA	±470 µF	74%	JTC0624D03†^A
	±5.0 V	±600 mA	10 mA	312 mA	±680 µF	80%	JTC0624D05†^A
	±9.0 V	±333 mA	18 mA	309 mA	±100 µF	81%	JTC0624D09
	±12.0 V	±250 mA	20 mA	301 mA	±330 µF	83%	JTC0624D12†^A
	±15.0 V	±200 mA	22 mA	305 mA	±100 µF	82%	JTC0624D15†^A
±24.0 V	±125 mA	18 mA	312 mA	±22 µF	80%	JTC0624D24	
18-72 V	3.3 V	1400 mA	15 mA	126 mA	1000 µF	76%	JTC0648S3V3†^A
	5.0 V	1200 mA	8 mA	156 mA	1000 µF	80%	JTC0648S05†^A
	9.0 V	667 mA	10 mA	153 mA	220 µF	82%	JTC0648S09
	12.0 V	500 mA	10 mA	151 mA	1000 µF	83%	JTC0648S12†^A
	15.0 V	400 mA	10 mA	149 mA	100 µF	84%	JTC0648S15†^A
	18.0 V	334 mA	10 mA	151 mA	10 µF	83%	JTC0648S18
	24.0 V	250 mA	12 mA	151 mA	22 µF	83%	JTC0648S24
	±3.3 V	±909 mA	10 mA	162 mA	±330 µF	77%	JTC0648D03†^A
	±5.0 V	±600 mA	10 mA	158 mA	±470 µF	79%	JTC0648D05†^A
	±9.0 V	±333 mA	15 mA	154 mA	±100 µF	81%	JTC0648D09
	±12.0 V	±250 mA	10 mA	152 mA	±100 µF	82%	JTC0648D12†^A
	±15.0 V	±200 mA	15 mA	149 mA	±47 µF	84%	JTC0648D15†^A
±24.0 V	±125 mA	15 mA	154 mA	±22 µF	81%	JTC0648D24	

Notes

- For optional 3500 VDC isolation add suffix '-H' to model number.
- Input current measured at nominal input voltage.
- Maximum capacitive load is per output.
- Cross regulation for duals is ±5% when one output is at 100% and the other is varied between 25% and 100%.

Mechanical Details and Application Note

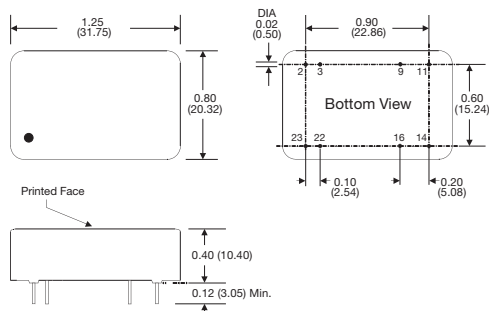

Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	N.C.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

- All dimensions are in inches (mm)
- Weight: 0.04 lbs (17 g) approx.
- Pin diameter: 0.02 ±0.002 (0.5 ±0.005)
- Pin pitch tolerance: ±0.014 (±0.35)
- Case tolerance: ±0.02 (±0.5)

Input Filter

