


MBW SERIES

EMI Filters 1A ~ 5A 250VAC

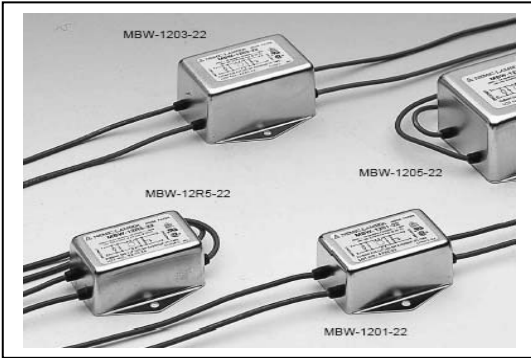


Features

- Attenuates conductive noise from switching power supplies
- Panel mount metal case shield
- Attenuation against High Voltage Pulse Noise
- Leakage current 1mA max at 250VAC
- Safety approvals
- Attenuation 150kHz ~ 30MHz
- Suitable for a wide range of OEM equipments that need to confirm to international EMI standards
- Visit our website for Attenuation Graphs

	MBW-1201-22	MBW-1202-22	MBW-1203-22	MBW-1205-22
Rated Current	1A	2A	3A	5A
Rated Voltage	250VAC or DC			
Test Voltage (Terminals – Case 1 min)	2500VAC			
Isolation Voltage	500VDC			
Leakage Current	0.5A @ 125VAC 60Hz, 1mA @ 250VAC 60Hz			
Temperature Rise	30°C			
Operating Temperature	-25°C to +60°C at 100% rating ,(Derate to 40% at 80°C)			
Safety	UL1283, EN133200			
Size - Chassis	50 x 50 x 22mm	50 x 50 x 22mm	46 x 56 x 30mm	60 x 62 x 35mm
Cable length	300mm			
Weight	95g	95g	160g	290g

PBW SERIES

EMI Filters 1A ~ 5A 250VAC

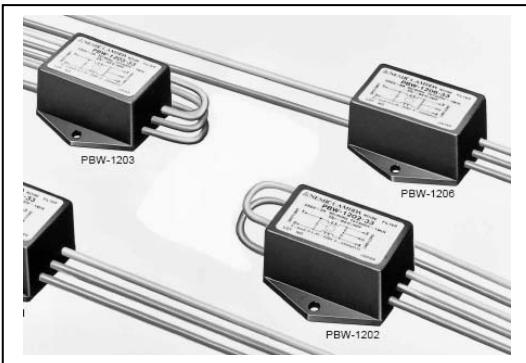

Features

- Attenuates conductive noise from switching power supplies
- Leakage current 1mA max at 250VAC
- Attenuation against High Voltage Pulse Noise
- Safety approvals
- Panel mount Plastic case
- Suitable for a wide range of OEM equipments that need to confirm to international EMI standards
- Attenuation 150kHz ~ 30MHz
- Visit our website for Attenuation Graphs

	PBW-1201-33	PBW-1202-33	PBW-1203-33	PBW-1206-33
Rated Current	1A	2A	3A	6A
Rated Voltage	250VAC or DC			
Test Voltage (Terminals – Case 1 min)	1500VAC			
Isolation Voltage	500VDC			
Leakage Current	0.35A @ 125VAC 60Hz, 0.75mA @ 250VAC 60Hz			
Temperature Rise	30°C			
Operating Temperature	-25°C to +60°C at 100% rating ,(Derate to 40% at 80°C)			
Safety	UL1283, EN133200			
Size - Chassis	40 x 46 x 20mm			
Cable length	300mm			
Weight	60g			