

RWR212 SERIES

Rail DC/ DC Converters Single Output: 200 Watts



General Specifications

Input Voltage	24VDC (14.4 ~ 34) 36VDC (22 ~ 51) 48VDC (29 ~ 67) 72VDC (43 ~ 101) 96VDC (58 ~ 135) 110VDC (66 ~ 154)
	• Other voltages on request
Input Protection	Reverse polarity protection. Inrush current limiting Lower voltage than specified will not damage unit
Isolation	Input - Output 3000vdc Input – Chassis 1500vdc Output – Chassis 1500vdc
Efficiency	Model dependent , typically 80-90%
Output voltage	See tables
Output Power	200 watts
Voltage Adjust.	Fixed output
Immunity	EN50155 & EN50121-3-2 EN61000-4-2 ESD EN61000-4-3 RF Immunity EN61000-4-4 Fast Transients EN50155 Surge & Voltage variations EN61000-4-6 Conducted Immunity
RIA	RIA12, RIA13, RIA20
EMI	EN5022 Class B Conducted & Radiated
Switching Freq.	80kHz ±5kHz
Regulation	±1% Line / Load combined
Dynamic Response	Max ±5% diviation for 10% - 50% load step with 1msec recovery
Ripple & Noise	Typically 1% pk-pk or 0.2% RMS of output voltage (20MHZ BW)
Overload Protection	Rectanular current limiting, with hiccup type short-circuit protection
Overvoltage Protection	Second regulator loop, independent of main regulator loop
Operating Temp.	-40°C to +70°C cold plate temperature
Cooling	Conduction cooling via base plate to customer chassis or heatsink
Environmental Protection	Full encapsulation with thermally conductive silicon potting with UL94V-0 rated
Shock & Vibration	IEC61373 Cat 1 A & B and Cat 2
Humidity	5-95% non-condensing, higher ration option
MTBF	>150,000 hrs

Features

- Designed to rail standards EN50155 & EN50121
- Designed to RIA12
- Fully potted with thermally conductive MIL-Spec silicon rubber compound.
- Rugged design for on-board train applications
- Wide input voltage range
- Convection / Conduction cooled: No fans
- Fully isolated input – output 3000VDC
- Over voltage protection
- Overload and short circuit protection
- MTBF > 150,000hrs
- Specials input / output combinations on request.

Description

The **RWR212** series dc/dc converters are designed for use on Rail Rolling Stock and for many extremely harsh environments.

They are fully potted with a thermally conductive MIL-Spec silicon compound, meeting a high level of shock and vibration.

The table below illustrate the most common output voltages, but can also be manufactured to special input & output specifications with total flexibility to match customer requirements.


Model	Output		Power W
	V	A	
RWR212	12V	16A	200W
	24V	8A	
	36V	5.5A	
	48V	4.0A	
	Other outputs upon request		

- Final part numbers will be factory allocated to reflect customer input & output requirements.

LED / Indicator	Optional
Alarm output	Optional on some models
Connector	5 pole barrier-type terminal block with 3/8"spacing. (optional cover)
Dimensions	94 x 60 x 230mm (P200L) W x H x L (includes terminal block & mounting flanges)
Weight	1.3kg

RWR212 SERIES

Rail DC/ DC Converters Single Output: 200 Watts

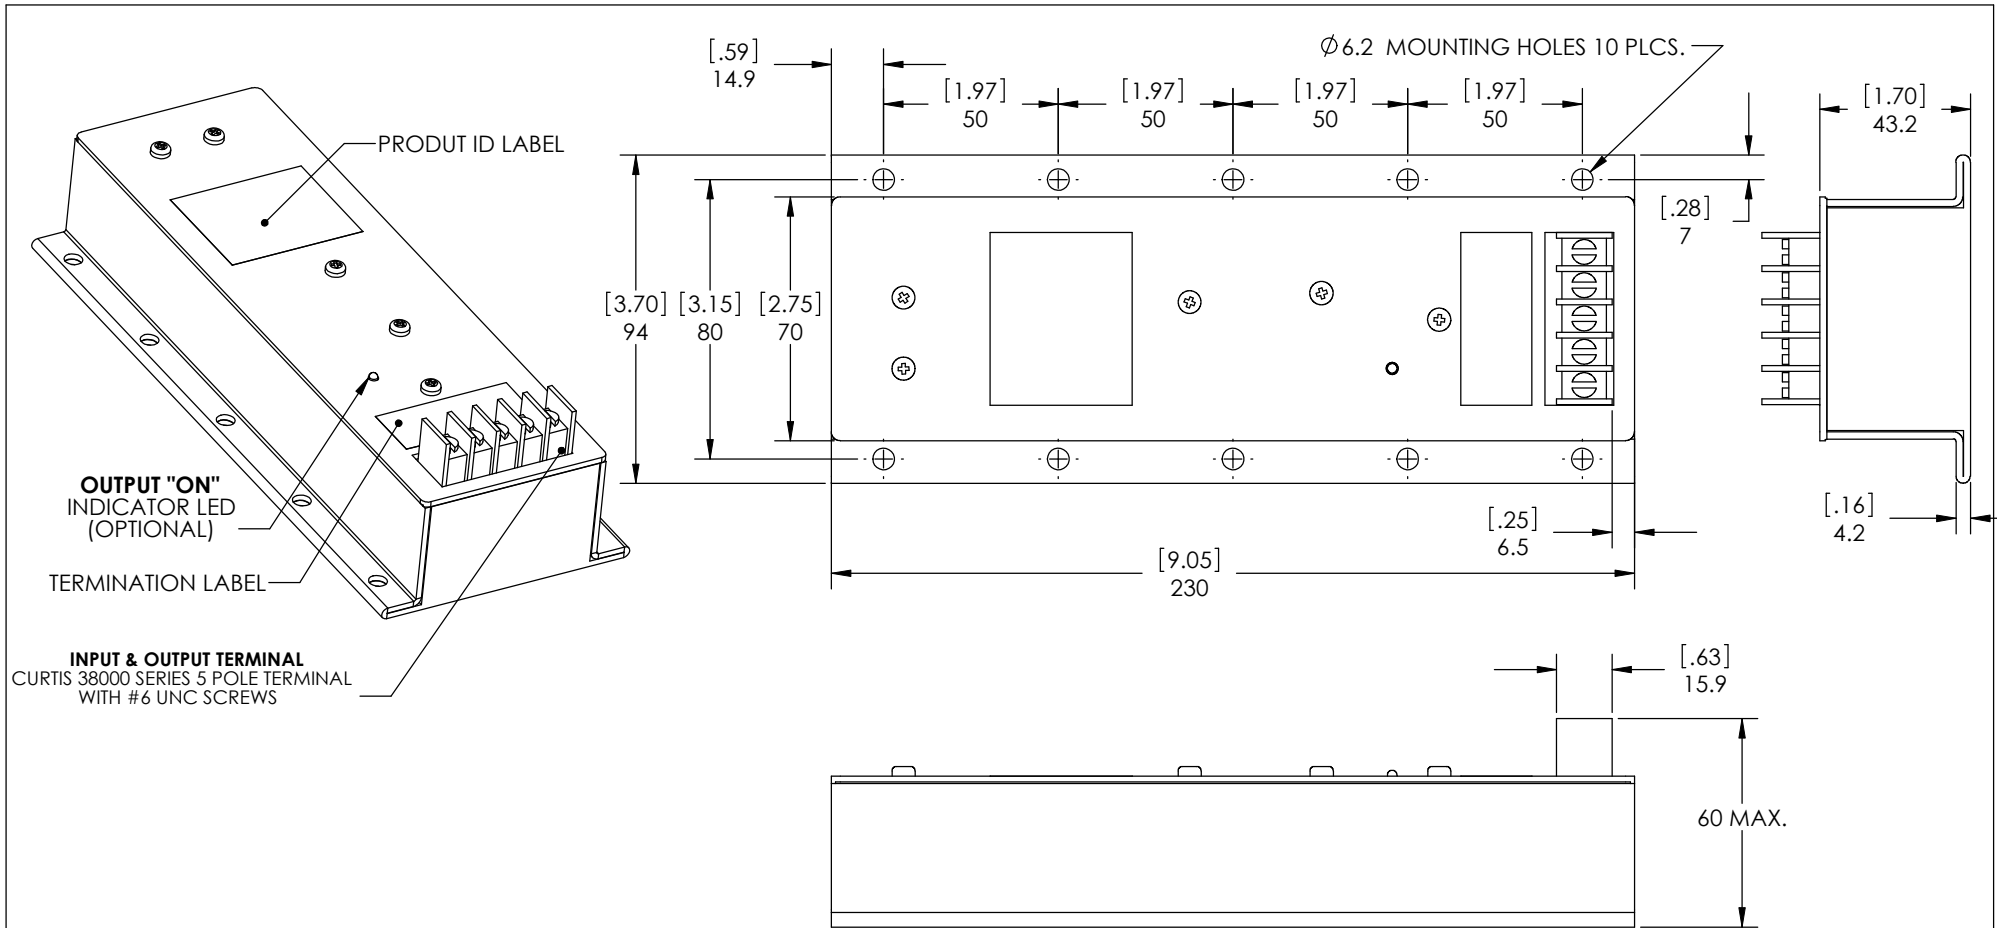

CASE MATERIAL: ALUMINUM 5052-H32
 FINISH: CLEAR CHROMATE AS PER MIL-C-5541E CLASS3
 THE UNIT IS POTTED WITH THERMALLY CONDUCTIVE POTTING COMPOUND

DIMENSIONS ARE IN MILLIMETERS
 [INCHES] TOLERANCES ON
 DECIMALS: XXX ± 0.2mm
 XX ± 0.3mm
 ANGLES: ± 2°
 FRACTIONS: ± 0.4mm
 UNLESS OTHERWISE STATED

THIS DOCUMENT IS THE PROPERTY
 OF AMTEX ELECTRONICS LTD.
 ITS CONTENTS ARE PROPRIETARY AND
 MAY NEITHER BE COPIED, REPRODUCED
 NOR ITS CONTENTS DISCLOSED TO OTHERS
 WITHOUT PRIOR WRITTEN AGREEMENT
 FROM AMTEX ELECTRONICS LTD.

Title: OUTLINE DRAWING
 Part of: P 200L

